

Semi-traction batteries with a positive tubular plate

BP6DPP180

BASIC INFORMATION

MODEL	BP6DPP180
VOLTAGE	6V
CAPACITY	180Ah @ 5Hr
CYCLICAL LIFE	1200 cycles
ELECTROLYTE	With liquid electrolyte

CONSTRUCTION

- three cells consisting of a set of positive tubular plates and a group of negative pasted plates and a set of PE sleeve separators
- casing made of polypropylene with a welded polypropylene lid, provided with three filling openings closed with plugs
- electrolyte

SPECIFICATION

MODEL	TERMINAL	POLARIZATION	DIMENSIONS				WEIGHT
			LENGTH	WIDTH	HEIGHT	WITH TERMINAL	
BP6DPP180	T1	RIGHT +	242,0mm	190,0mm	285,0mm	285,0mm	29,0kg



ELECTRICAL SPECIFICATIONS

CAPACITY WHEN DISCHARGED UP TO 1.75V / CELL AT 25°C			CHARGING CURRENT	
2h	5h	20h	START	FINAL
140Ah	180Ah	219Ah	30A	8A

RECYCLING




DIMENSIONS

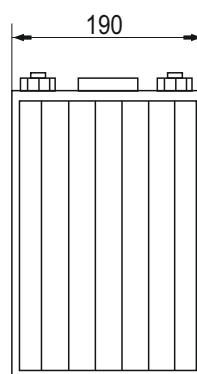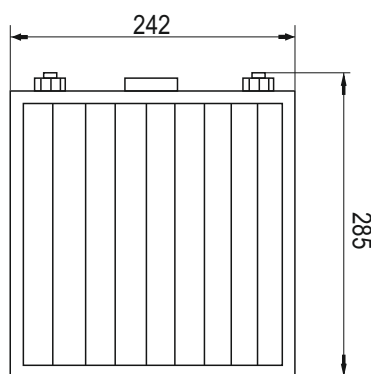

SAFETY



TERMINAL TYPE

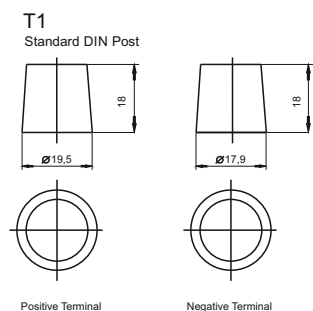

ENVIRONMENT INFORMATION

EXPLOITED BATTERIES ARE CONSIDERED AS HAZARDOUS WASTE. THESE WASTES DUE TO THEIR ORIGIN, CHEMICAL COMPOSITION (THEY CONTAINS HEAVY METALS LIKE LEAD AND OTHER TOXIC SUBSTANCES) AND OTHER FEATURES MAY BE DANGEROUS FOR ENVIRONMENT AND HUMAN OR ANIMAL HEALTH LIFE. ACCORDING TO THE WASTE ACT, WASTE IN THE FORM OF BATTERIES AND ACCUMULATORS SHOULD BE COLLECTED SEPARATELY FROM OTHER TYPES OF WASTE.

IN ORDER TO OBTAIN MORE DETAILED INFORMATION, WE ENCOURAGE YOU TO CONTACT US, WE PROVIDE ANY INFORMATION ON HOW TO HANDLE WITH WASTE BATTERIES AND ACCUMULATORS.