


# BPOWER GB5L-B 5Ah 75A




Sealed, maintenance-free, factory-started batteries made using GEL technology. They are used in newer generation motorcycles and in all quads, jet skis and snowmobiles. SUPREME series batteries meet the most demanding customer expectations regarding failure-free operation even in the most difficult conditions. Apart from checking the voltage at the poles, no additional checks are required. They are characterized by high starting currents, which additionally affects the comfort of use. They meet the most demanding safety standards.

BASIC PARAMETERS		TECHNOLOGY	
Nominal voltage (V)	12	Technology	CA/CA
Nominal capacity C10 (Ah)	5	Separator	AGM
Cold cranking amperage	75		
PHYSICAL PARAMETERS		CHARGING PARAMETERS (25°C)	
Dimensions (L x W x H)	120 x 60 x 130 mm	Charging voltage	14,0V - 14,4V
Weight (kg)	1,90	Recommended max. charging current	0.5A
Terminal type	6		


## Terminal type



Front view




Side view






Top view

## Cell layout



0

## Dimensions

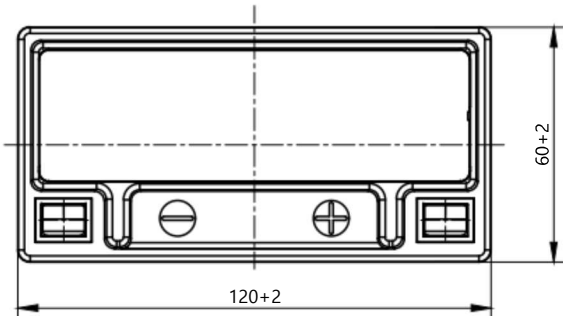

**Headquarters in Warsaw**  
Jana Kazimierza 61  
01-267 Warszawa

**Branch in Gdansk**  
Twarda 12  
80-871 Gdańsk

+48 22 877 54 96  
biuro@baterie.com.pl  
www.baterie.com.pl

**BP BATERIE**  
PRZEMYSŁOWE