


BPOWER 629 SHD 185Ah 1200A

CARGO SHD series batteries were designed for well-equipped commercial vehicles, such as trucks, coaches, construction machinery, fire trucks. Ideal for 24-hour operation in a continuous cycle and harsh conditions. Thanks to the Glassmat separator and gluing packages, they have increased resistance to vibration and shock. These advanced and maintenance-free batteries with SHD technology ensure high cyclic durability and long life.

BASIC PARAMETERS		TECHNOLOGY	
Nominal voltage (V)	12	Technology	Ca/Ca
Nominal capacity 20HR (Ah)	185	Performance marking	W5 - C2 - V3 - E3
Cold cranking perform. (EN -18°C)	1200	Electrolyte density in 25°C	1.28 ± 0.01g/cm3
Recom. charging current	18A		
PHYSICAL PARAMETERS		CASE FEATURES	
Dimensions (L x W x H)	513 x 223 x 223 mm	Case type	DIN B
Weight (kg)	46,70	Hold down	N
Terminal type	T1	Handles	✓
Case material	Polipropylen PP	Cell layout	3
		Lid type	SMF double lid


Terminal type

T1



Cell layout

3

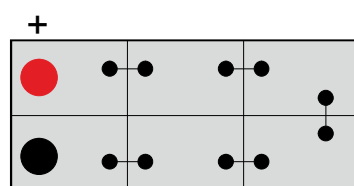

Battery hold down

N



Headquarters in Warsaw
Jana Kazimierza 61
01-267 Warszawa

Branch in Gdansk
Twarda 12
80-871 Gdańsk

+48 22 877 54 96
biuro@baterie.com.pl
www.baterie.com.pl

BP BATERIE
PRZEMYSŁOWE